

520Wp-550Wp

Mono PERC PV Modules

Mono Facial | DCR & Non-DCR


ADm Solar

144 M10
Halfcut Cells

10BB Mono
PERC Technology

21.50%
Max Efficiency

0 to +5Wp
+Ve Power Tolerance

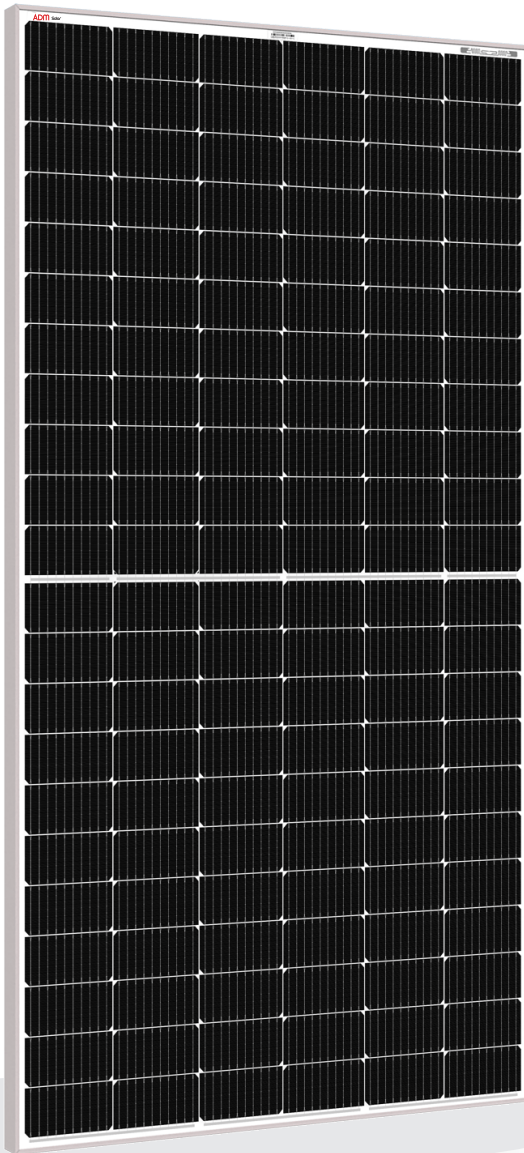

MBB Cell Technology

Reduces conversion losses while enhancing partial shade performance. Ensures improved light absorption & minimizes cell stress for better efficiency.



Round Ribbons

Cylindrical tabbing wires reduce shadowing on the active cell area, allowing greater light absorption and improved module efficiency.



Lower Thermal Coefficients

Optimized temperature coefficients enable higher power generation even in high ambient temperature conditions.



0% Microcracks & Hotspots

Pre & post Electroluminescence (EL) inspections ensure modules are free from defects such as microcracks & hotspots.



High Profitability

Lower Balance of System (BOS) costs lead to greater savings, reduced LCOE, and a faster return on investment.



AR Coated Glass

Highly reliable Anti-Reflective (AR) coated glass surface enhances light absorption and improves module performance.



Excellent Partial Shade Performance

Half-cut cell design delivers better power output even under partial shading conditions.



Precision Engineering

Manufactured in a fully automated facility with advanced machinery and subjected to 55 stringent quality checks.

25 YEARS
Performance Warranty

10 YEARS
Product Warranty



Know More

Certifications



IEC 61215/IS14286, IEC 61730-1, IEC 61730-2, IEC 62804 (PID), IEC 61701 (Salt Mist), IEC 62716 (Ammonia Corrossion), IEC 61853 (Performance, PAN & IAM), IEC 60068-2 (Sand Dust), IEC 62782 (DMLT), LID, LeTID, BIS Approved, ALMM Enlisted

Applications




Utility
Projects



Home &
Residential



C & I
Projects



Water
Pumps

Electrical Characteristics (STC)

| Model Series | ADM M520 | ADM M525 | ADM M530 | ADM M535 | ADM M540 | ADM M545 | ADM M550 |
|----------------------------------|----------|----------|----------|----------|----------|----------|----------|
| Maximum Power – Pmax (Wp) | 520 | 525 | 530 | 535 | 540 | 545 | 550 |
| Maximum Power Voltage – Vmpp (V) | 42.60 | 42.80 | 41.76 | 41.99 | 42.21 | 42.46 | 42.68 |
| Maximum Power Current – Imp (A) | 12.21 | 12.28 | 12.70 | 12.75 | 12.80 | 12.85 | 12.89 |
| Open Circuit Voltage – Voc (V) | 48.96 | 49.32 | 49.94 | 50.00 | 50.16 | 50.30 | 50.49 |
| Short Circuit Current – Isc (A) | 13.30 | 13.39 | 13.50 | 13.56 | 13.60 | 13.65 | 13.69 |
| Module Efficiency (%) | 20.16 | 20.35 | 20.51 | 20.71 | 20.90 | 21.09 | 21.29 |
| Fill Factor (FF) | 79.85 | 79.49 | 78.61 | 78.90 | 79.15 | 79.35 | 79.57 |

STC: 1000W/m² irradiance, 25°C cell temperature, AM1.5G spectrum according to EN 60904-3
Average relative efficiency reduction of <5% for every 200W/m² reduction in Irradiance, according to EN 60904-1

Electrical Characteristics (NOCT)

| | | | | | | | |
|----------------------------------|-------|--------|-------|--------|-------|--------|-------|
| Maximum Power – Pmax (Wp) | 379.6 | 383.25 | 386.9 | 390.55 | 394.2 | 397.85 | 401.5 |
| Maximum Power Voltage – Vmpp (V) | 31.78 | 31.93 | 31.15 | 31.32 | 31.49 | 31.68 | 31.84 |
| Maximum Power Current – Imp (A) | 9.88 | 9.93 | 10.27 | 10.31 | 10.36 | 10.40 | 10.43 |
| Open Circuit Voltage – Voc (V) | 36.52 | 36.79 | 37.26 | 37.30 | 37.42 | 37.52 | 37.67 |
| Short Circuit Current – Isc (A) | 10.76 | 10.83 | 10.92 | 10.97 | 11.00 | 11.04 | 11.08 |

NOCT: 800W/m² irradiance, 20°C ambient temperature, Wind Speed 1 m/sec



Temperature Co-Efficient (Tc) and Permissible Operating Conditions

| | |
|-----------------------------------|----------------|
| Temperature Co-Efficient of Voc | -0.27 %/°C |
| Temperature Co-Efficient of Isc | 0.045 %/°C |
| Temperature Co-Efficient of Power | -0.35 %/°C |
| NOCT | 45 ± 2°C |
| Maximum series fuse ratings | 25A |
| Temperature Range | -40°C to +85°C |
| Maximum System Voltage | 1500 V DC |


Mechanical Characteristics

| | |
|------------------------|---|
| Module Dimensions | 2094 mm x 1133 mm x 35 mm |
| Module Weight | 28Kg |
| Solar Cells (PID Free) | 132 (11 x 6 x 2) Mono PERC Cut Cells, 10BB (91 x 182)mm |
| Front Glass | 3.2mm high transmission AR Coated Ion Tempered PV Glass |
| Cell Encapsulant | PID Free EVA (Ethylene Vinyl Acetate) - FC / UFC |
| Frame | Silver Anodized Aluminium Frame with twin wall profile |
| Backsheet | Composite Film (White / Black / Transparent) |
| Junction Box | IP68 Rated, Split Junction Box with Individual bypass Diode |
| Cables | 400 mm (+) / 400 mm (-) with MC4 Compatible Connectors |
| Application Class | Class A (Safety Class II) |
| Mechanical Load | 5400 Pa (Snow) / 2400 Pa (Wind) |
| Packaging | Standard 28 Modules per Pallet |


Note: Specifications subject to change without prior notice.

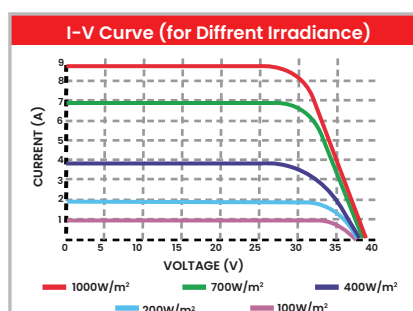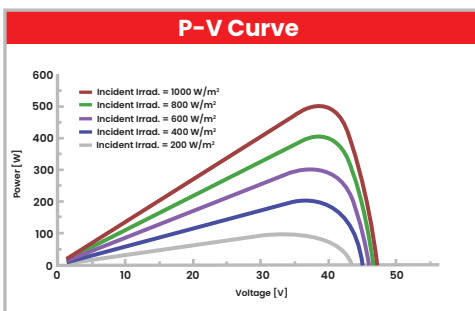

Back Side of Panel

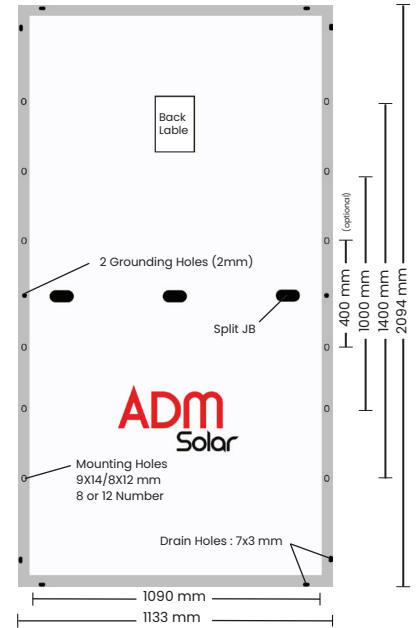

Warranty Graph

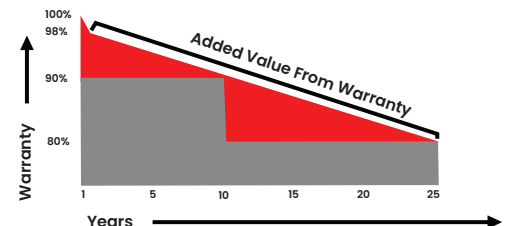

Product Warranty: 10 Years
Performance Warranty: Linear Power Warranty for 25 Years with <2% degradation for 1st year and 0.5% from 2 to 25 year.

Approvals and certifications

| | |
|-----------------------|---|
| Products: | IEC 61215/IS14286, IEC 61730-1, IEC 61730-2, IEC 62804 (PID), IEC 61701 (Salt Mist), IEC 62716 (Ammonia Corrosion), IEC61853 (Performance, PAN & IAM), IEC 60068-2 (Sand Dust), IEC 62782 (DMLT), LID, LeTID, BIS Approved, ALMM Enlisted |
| Manufacturing: | ISO 9001:2015, ISO 14001: 2015 ISO 45001:2018 |

PACKAGING INFORMATION

| Truck Type | No. of Pallets | No. of Modules | KW (Approx) |
|----------------|----------------|----------------|-------------|
| 22 ft. | 12 | 336 | 168 |
| 40 ft. | 22 | 616 | 308 |
| Container Type | No. of Pallets | No. of Modules | KW (Approx) |
| 40 HQ | 22 | 616 | 308 |